


Driveway Care

Please read carefully as failure to do so will affect your warranty

1. We ask that you keep car traffic off of your driveway for at least 1 day.
2. If temperatures are very hot we ask that you try not to park on your drive for up to 2 days. You may walk on your drive right away.
3. Your driveway will need 6-12 months to harden and cure. It will remain soft and pliable until then. Even after it has cured it will not be as hard as concrete. Your driveway will soften and harden as temperatures rise and fall. Please be aware of this in hot temperatures. If you wish, you may water down your drive with a hose on hot days to temporarily harden the drive.
4. During the curing period spot damage may occur on your drive if cars accelerate hard or stop too fast. This also may happen if you turn your steering wheel when the car is not moving and is particularly applicable to vehicles with power steering.

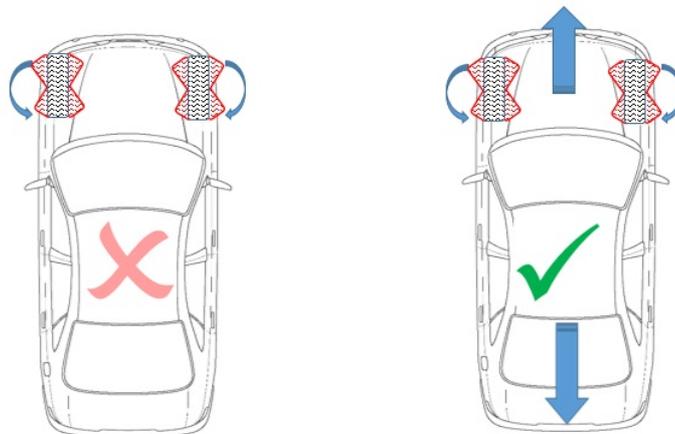

5. During spells of hot weather particular caution should be taken when manoeuvring and use of power steering when stationary. It is advised at all times for your vehicle to be in motion to avoid surface damage.

6. **Keep heavy trucks off your new driveway. Large heavy trucks will depress your new driveway surface.**
7. **To prevent holes or depressions in your new driveway surface,** place plywood squares under deck chairs, motorcycle kickstands, ladders, car ramps or jacks. They exert weight on concentrated areas and will mark your drive. When storing boats or a caravan for a long period, again place a piece of plywood under the tyres to help distribute the weight.
8. **Avoid driving off the edges of your driveway.** They will crack and crumble due to the lack of side support. You may support the sides by building up the edges with topsoil or ask about a kerb edge prior to the surface being laid.
9. **It is natural for the texture of your driveway surface to be varied.** It is caused by the various sizes of sand, stone and other ingredients that make up your macadam surface. Also, areas that are laid by hand will appear different than those laid by machine.
10. **Take special care not to spill** petrol, oil, antifreeze, transmission and power steering fluid as these will soften and break up your driveway. If this happens, immediately remove with hot soapy water. If any of surface has become damaged or should soften, we would advise that the area should be professionally repaired.